


PIX-X'ACT® CT


STANDARDS: CLASSICAL BELTS

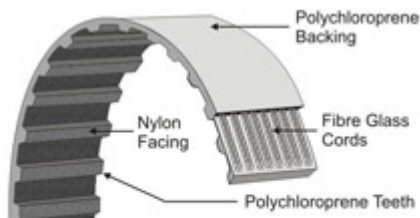

PIX-X'act® CT 270 XL XL 025
PIX-X'act® CT 270 XL XL 025

270 XL 025		
270	XL	025
Pitch Length 27"	Section (Tooth pitch 5.080 mm)	Belt Width 0.25"

Section	Pitch (mm)	Tooth Height 'B' (mm)	Belt Thickness 'C' (mm)
XL	5.080	1.27	2.30
L	9.525	1.91	3.60
H	12.700	2.29	4.30



Conforms to BS 4548 Standards.

Product Range:

XL Section	
Section	No. of Teeth
130 XL	65
140 XL	70
150 XL	75
160 XL	80
170 XL	85
180 XL	90
190 XL	95
200 XL	100
210 XL	105
220 XL	110
230 XL	115
240 XL	120
250 XL	125
260 XL	130
270 XL	135
276 XL	138
280 XL	140
300 XL	150
330 XL	165
412 XL	206
450 XL	225

L Section	
Section	No. of Teeth
124 L	33
150 L	40
180 L	48
187 L	50
203 L	54
210 L	56
225 L	60
240 L	64
255 L	68
270 L	72
285 L	76
300 L	80
322 L	86
330 L	88
345 L	92
367 L	98
390 L	104
420 L	112
450 L	120
480 L	128
510 L	136
525 L	140
540 L	144
600 L	160
630 L	168
720 L	192

H Section	
Section	No. of Teeth
230 H	46
240 H	48
255 H	51
270 H	54
280 H	56
285 H	57
300 H	60
320 H	64
330 H	66
340 H	68
350 H	70
360 H	72
370 H	74
375 H	75
390 H	78
400 H	80
410 H	82
420 H	84
430 H	86
450 H	90

H Section	
Section	No. of Teeth
465 H	93
470 H	94
480 H	96
490 H	98
510 H	102
520 H	104
540 H	108
560 H	112
570 H	114
600 H	120
630 H	126
650 H	130
660 H	132
670 H	134
700 H	140
725 H	145
730 H	146
750 H	150
770 H	154
800 H	160

H Section	
Section	No. of Teeth
810 H	162
820 H	164
850 H	170
900 H	180
950 H	190
1000 H	200
1050 H	210
1100 H	220
1120 H	224
1140 H	228
1150 H	230
1200 H	240
1250 H	250
1325 H	265
1350 H	270
1400 H	280
1450 H	290
1600 H	320
1700 H	340

Features:

- Trapezoidal tooth profile.
- High efficiency due to positive engagement between belt teeth and pulley grooves.
- No re-tensioning required.
- Free from maintenance.



PIX Hydraulics Europe Limited
email: info@pixhose.com

- No high tension required.