


PIX-X'ACT® STD


STANDARDS: BELTS

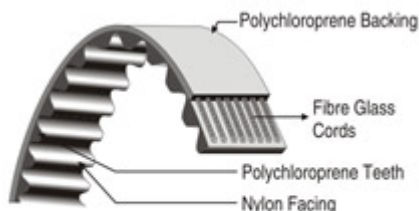

PIX-X'act® STD S 5M 650 S 5M 15
PIX-X'act® STD S 5M 650 S 5M 15
PIX-X'act® STD S 5M 650 S 5M 15

STD 150 S 5M 650		
STD 150	S 5M	650
Belt Top Width 15 mm	Section (Tooth pitch 5.0 mm)	Pitch Length 650 mm

Section	Pitch (mm)	Tooth Height 'B' (mm)	Belt Thickness 'C' (mm)
S 5M	5.00	1.91	3.40
S 8M	8.00	3.05	5.30



Conforms to ISO 13050 / PIX Standards.

Product Range:

S 5M Section		
Section	Pitch Length (mm)	No. of Teeth
STD S 5M 375	375.00	75
STD S 5M 400	400.00	80
STD S 5M 500	500.00	100
STD S 5M 520	520.00	104
STD S 5M 575	575.00	115
STD S 5M 600	600.00	120
STD S 5M 625	625.00	125
STD S 5M 650	650.00	130
STD S 5M 675	675.00	135
STD S 5M 750	750.00	150
STD S 5M 800	800.00	160
STD S 5M 830	830.00	166
STD S 5M 850	850.00	170
STD S 5M 1000	1000.00	200
STD S 5M 1050	1050.00	210
STD S 5M 1195	1195.00	239
STD S 5M 1270	1270.00	254
STD S 5M 2525	2525.00	505

S 8M Section		
Section	Pitch Length (mm)	No. of Teeth
STD S 8M 376	376.00	47
STD S 8M 440	440.00	55
STD S 8M 480	480.00	60
STD S 8M 520	520.00	65
STD S 8M 560	560.00	70
STD S 8M 584	584.00	73
STD S 8M 600	600.00	75
STD S 8M 632	632.00	79
STD S 8M 656	656.00	82
STD S 8M 712	712.00	89
STD S 8M 720	720.00	90
STD S 8M 760	760.00	95
STD S 8M 800	800.00	100
STD S 8M 824	824.00	103
STD S 8M 840	840.00	105
STD S 8M 848	848.00	106
STD S 8M 880	880.00	110
STD S 8M 896	896.00	112
STD S 8M 944	944.00	118
STD S 8M 960	960.00	120
STD S 8M 1000	1000.00	125
STD S 8M 1032	1032.00	129

S 8M Section		
Section	Pitch Length (mm)	No. of Teeth
STD S 8M 1040	1040.00	130
STD S 8M 1056	1056.00	132
STD S 8M 1072	1072.00	134
STD S 8M 1120	1120.00	140
STD S 8M 1200	1200.00	150
STD S 8M 1248	1248.00	156
STD S 8M 1256	1256.00	157
STD S 8M 1280	1280.00	160
STD S 8M 1304	1304.00	163
STD S 8M 1320	1320.00	165
STD S 8M 1344	1344.00	168
STD S 8M 1352	1352.00	169
STD S 8M 1360	1360.00	170
STD S 8M 1400	1400.00	175
STD S 8M 1424	1424.00	178
STD S 8M 1440	1440.00	180
STD S 8M 1680	1680.00	210
STD S 8M 1728	1728.00	216
STD S 8M 1800	1800.00	225
STD S 8M 1912	1912.00	239
STD S 8M 2000	2000.00	250
STD S 8M 2400	2400.00	300
STD S 8M 2600	2600.00	325

Features:

- Modified curvilinear tooth design.
- Modified & accurately spaced teeth ensure optimum entry/exit.
- Minimum noise level.
- Fiber glass tensile cords provide strength, excellent flex life and high resistance to elongation.
- Durable backing protects against environmental pollution, friction & wear.



PIX Hydraulics Europe Limited
email: info@pixhose.com

-
- Tough nylon facing protects tooth surface.